



Local Service Wire Policy

Chazy and Westport Communications (C&W) will provide 500 feet of fiber / copper at no cost. Beyond 500 feet the customer will pay an additional fee for the fiber/copper.

C&W's preferred method of deployment is aerial. Overhead cable is usually placed on jointly used power poles and deployed at no cost. If a customer requires underground services the following specifications must be met with any cost associated being covered by the customer:


1. Meet with a representative from CW to confirm placement of conduit
2. Conduit must be placed in all cases and a minimum of 6 inches below ground.
3. Conduit must be a minimum of 1 inch inside diameter.
4. Conduit must have a pull line (not mason string) installed and the exposed ends covered.
5. Conduit must be brought up on the outside of the house/building and be exposed on both ends. (please temporarily cover with a bag or tin can)
6. Conduit can be placed in the same trench as the power conduit as long as a 24-inch minimum depth is achieved.
7. C&W will inspect conduit installs, prior to backfill to insure proper installation. An improper conduit install will delay your service hook-up.

We realize every job has its own unique set of conditions. If you have a question regarding the specifications and how they apply to your situation, please call C&W's Engineering Department at 518 846.7111 or 518.962.8211. We will gladly make a site visit to work out the details of your installation.

Typical Conduit Specification Drawing

Chazy Westport Communications

1. **ONT Mounts Inside the house. AC power needed.**
2. **Conduit in the house – approx 4 ft. above final grade.**
3. **Conduit in pedestal– 1ft above ground.**
4. **Conduit at mobile home– 4ft above ground on the outside of skirting.**

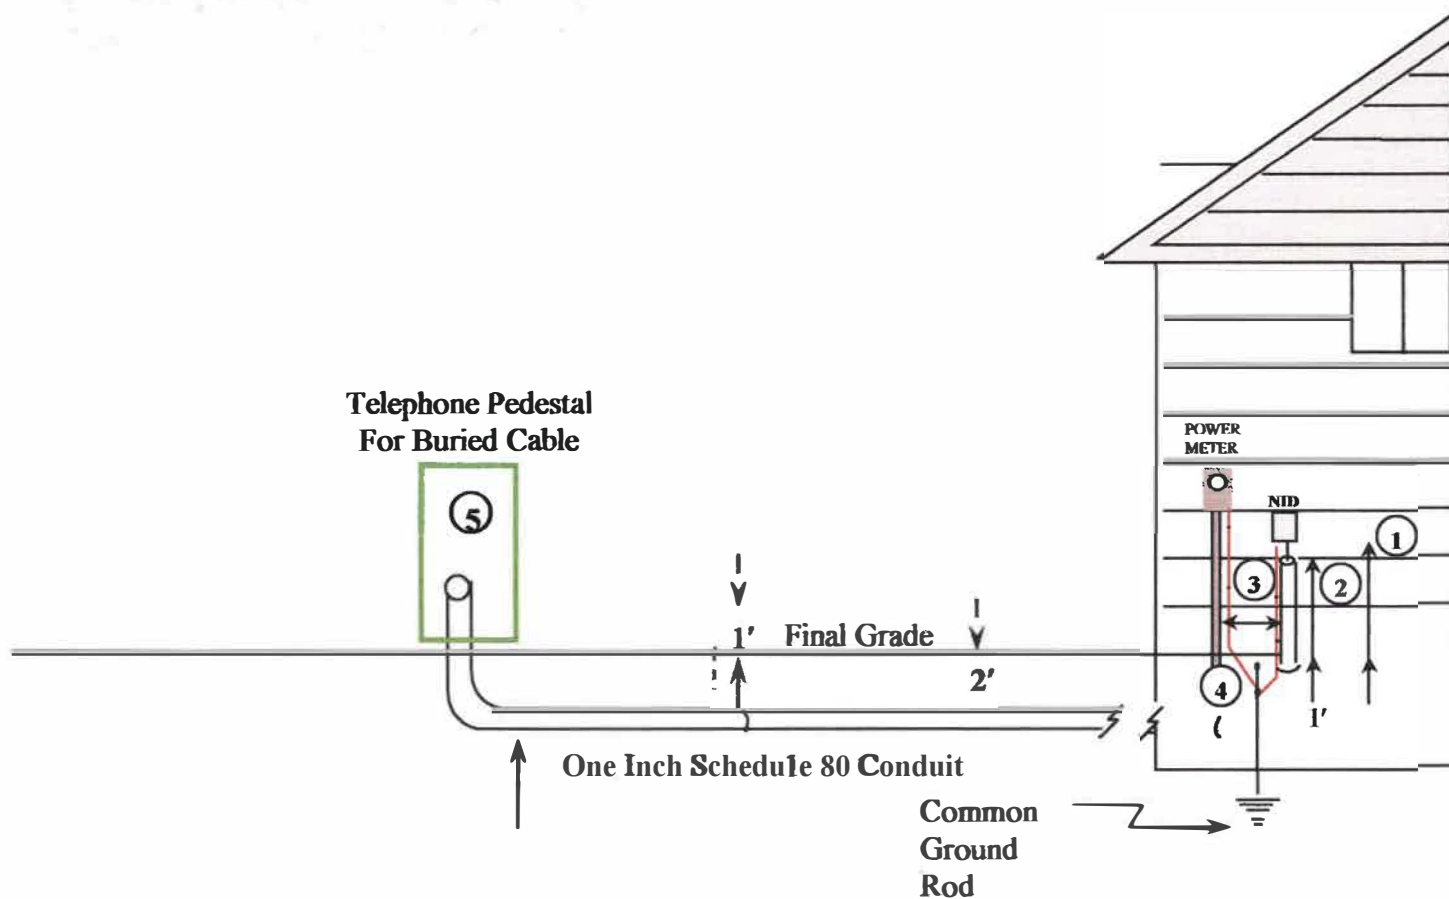

Typical Conduit Specification Drawing

Chazy Westport Communications

1. ONT mounts inside house. AC power needed.
2. Conduit in the house – Approx 4 ft. above final grade.
3. Conduit at the pole– 4ft above ground "tight to the pole"
4. Conduit at raobile horae – 4ft above ground on the outside of skirting

